

SALUKA-N

IP 66



Application: premises with danger of explosion. Light fixture is certified by FTZÚ Ostrava-Radvanice (certificate FTZU 08 ATEX 0133X).

Ballast: **K** – electromagnetic ballast 230 V/50 Hz, with parallel compensation
 / – electromagnetic ballast 230 V/50 Hz, without parallel compensation
EP – electronic ballast 220-240 V/50-60 Hz AC, 220-240 V DC, 176-280 V DC (min. discharge ignition voltage of lamp ≥ 198 V DC)

Body: White painted metal sheet RAL 9003

Cover: Tempered safety glass

Reflector: White painted metal sheet RAL 9003

Fastening: Direct fastening on ceiling or wall lighted area, fastening on ceiling by means of ceiling brackets, suspension by means of suspension brackets with steel or chain

Connection: Screwless three-pole terminal block, max. diameter of wires 2,5 mm²

Standard equipment: 1 pc sealing cable gland, 1 pc sealing plug, 2 pcs suspension bracket and 2 pcs rubber gasket

On request: **Em** – non-maintained emergency lighting (1 h, 3 h)

MULTI – maintained emergency lighting (1 h, 3 h)

1/3 F – one or three phase through-wiring connection

NEREZ – body from stainless steel metal sheet

AR – aluminium reflector (deep radiant)


PAR – parabolic reflector

AUTOTEST – light fitting equipped with autotest


Providing with cable glands for armoured cables

NANO – light fixture protected by special nanolayer (hydrophobic, oleophobic or antibacterial protection)

FTZÚ 08 ATEX 0133X

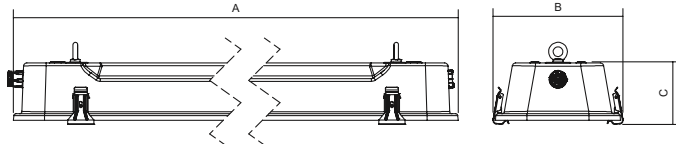

SALUKA, 2x36W, IP66



		AbxC (mm)		
- electronic ballast, -20°C ≤ t_a ≤ +40°C				
054374	SALUKA-N-136-EP, 1x36W		1305 x 192 x 90	
054375	SALUKA-N-236-EP, 2x36W	T26/G13	1305 x 192 x 90	
054376	SALUKA-N-158-EP, 1x58W		1605 x 192 x 90	
054377	SALUKA-N-258-EP, 2x58W		1605 x 192 x 90	
- electronic ballast, t_a ≤ +55°C				
054372	SALUKA-N-T55-118-EP, 1x18W	T26/G13	705 x 192 x 90	
054373	SALUKA-N-T55-118-EP, 1x18W		705 x 192 x 90	
- electronic ballast, t_a ≤ +60°C				
056323	SALUKA-N-T60-258-EP, 2x58W	T26/G13	1605 x 192 x 90	
056322	SALUKA-N-T60-158-EP, 1x58W		1605 x 192 x 90	
056321	SALUKA-N-T60-236-EP, 2x36W		1305 x 192 x 90	
056320	SALUKA-N-T60-136-EP, 1x36W		1305 x 192 x 90	
- maintained emergency lighting, 0 ≤ t_a ≤ 30°C				
054378	MULTISALUKA-N-218, 2x18W, 1h	T26/G13	705 x 192 x 90	
054379	MULTISALUKA-N-218-K, 2x18W, 1h		705 x 192 x 90	
054380	MULTISALUKA-N-136, 1x36W, 1h		1305 x 192 x 90	
054381	MULTISALUKA-N-136-K, 1x36W, 1h		1305 x 192 x 90	
054382	MULTISALUKA-N-236, 2x36W, 1h		1305 x 192 x 90	
054383	MULTISALUKA-N-236-K 2x36W, 1h		1305 x 192 x 90	
054384	MULTISALUKA-N-158, 1x58W, 1h		1605 x 192 x 90	
054385	MULTISALUKA-N-158-K, 1x58W, 1h		1605 x 192 x 90	
054386	MULTISALUKA-N-258, 2x58W, 1h		1605 x 192 x 90	
054387	MULTISALUKA-N-258-K, 2x58W, 1h		1605 x 192 x 90	
- maintained emergency lighting, electronic ballast, 0 ≤ t_a ≤ 30°C				
054388	MULTISALUKA-N-118-EP, 1x18W, 1h		T26/G13	705 x 192 x 90
054389	MULTISALUKA-N-218-EP, 2x18W, 1h			705 x 192 x 90
054390	MULTISALUKA-N-136-EP, 1x36W, 1h			1305 x 192 x 90
054391	MULTISALUKA-N-236-EP, 2x36W, 1h			1305 x 192 x 90
054392	MULTISALUKA-N-158-EP, 1x58W, 1h	1605 x 192 x 90		
054393	MULTISALUKA-N-258-EP, 2x58W, 1h	1605 x 192 x 90		
- special equipment				
008060	Cable gland Ex M20x1,5			
008097	Plastic nut WISKA EMUG 20 M20x1,5			
008090	Sealing plug Ex M20x1,5			
001995	Reflector AR – 2x36W deep radiant			
001996	Reflector AR – 2x58W deep radiant			
051139	Set of ceiling stainless steel bracket SALUKA (2 pcs)			
051145	Pole bracket (50 mm diameter)			

Application of light fixtures in areas with danger of explosion

	Marking of external influences	Classification areas	
		Marking	Formation prescription
Danger of explosion of flammable dust	BE3N1	ZONA 22	ČSN EN 60079-14 ČSN EN 60079-10-2
Danger of explosion of flammable gases and vapors	BE3N2	ZONA	ČSN EN 60079-14 ČSN EN 60079-10-1

SALUKA-N, SALUKA-N-EM, MULTISALUKA-N-EM

Ⓜ II 3G Ex nA IIC T4 Gc	Ⓜ II 3G Ex nA IIC T4 Gc
Ⓜ II 3D Ex tc IIIC T70°C Dc	Ⓜ II 3D Ex tc IIIC T70°C Dc